
Products introduction & overview - Caterpillar

Product

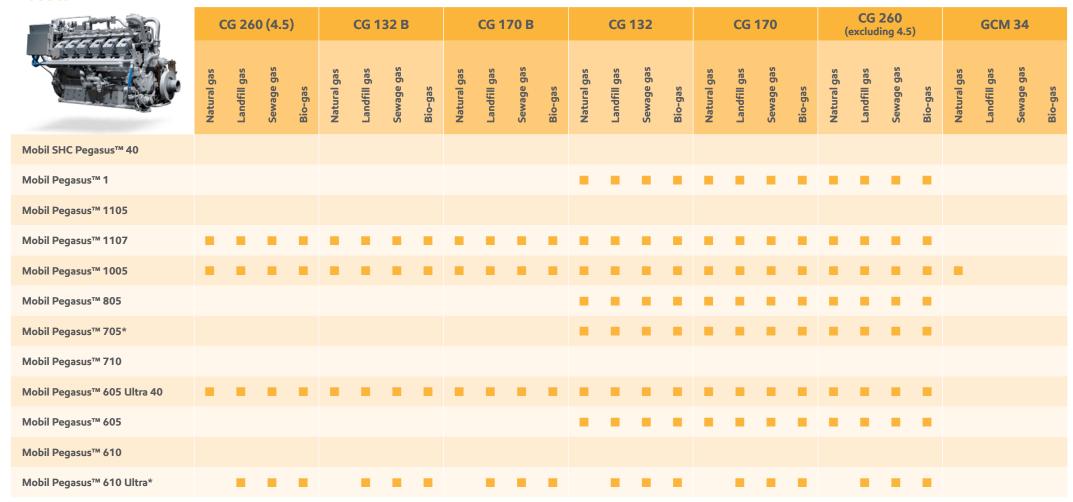

The specifications of the respective plant and engine manufacturers are priorities when selecting the right engine oil.

Approved

This document is provided for information purposes only. ExxonMobil accepts no responsibility for the contents of this document and gives no warranty to any product recommendations made within or about its effectiveness when applied to the users' business. It is the users' sole responsibility to ensure that the correct product is chosen for the given application. Always consult OEM manuals for proper recommendations for your equipment, which may depend on, for example, make, model, operating conditions. ExxonMobil shall not be responsible for any loss sustained by any person or entity in connection with use of this document. Due to continual product research and development by ExxonMobil and/or OEM, the information contained herein is subject to change without notice. All products may not be available locally. The information contained herein is Proprietary to Exxon Mobil Corporation or one of its subsidiaries. This information should not be given to unauthorised third parties without prior written consent of ExxonMobil. For additional information, please contact the ExxonMobil Technical Help Desk or contact the local ExxonMobil representative.



^{*} For extended oil drain intervals

Products introduction & overview - Cummins

Product

C STATE OF THE PARTY OF THE PAR	(14	QSV 8 4&16 B	1/910 ar BME	P)		QSK	60G		(QSV 18 Bar			HSK 78G					
	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas		
Mobil SHC Pegasus™ 40																		
Mobil Pegasus™ 1																		
Mobil Pegasus™ 1105																		
Mobil Pegasus™ 1107													•					
Mobil Pegasus™ 1005	•				•				•									
Mobil Pegasus™ 805	•				•				•									
Mobil Pegasus™ 705	•																	
Mobil Pegasus™ 710																		
Mobil Pegasus™ 605 Ultra 40																		
Mobil Pegasus™ 605																		
Mobil Pegasus™ 610		•	•	•														
Mobil Pegasus™ 610 Ultra*																		

The specifications of the respective plant and engine manufacturers are priorities when selecting the right engine oil.

Approved

This document is provided for information purposes only. ExxonMobil accepts no responsibility for the contents of this document and gives no warranty to any product recommendations made within or about its effectiveness when applied to the users' business. It is the users' sole responsibility to ensure that the correct product is chosen for the given application. Always consult OEM manuals for proper recommendations for your equipment, which may depend on, for example, make, model, operating conditions. ExxonMobil shall not be responsible for any loss sustained by any person or entity in connection with use of this document. Due to continual product research and development by ExxonMobil and/or OEM, the information contained herein is subject to change without notice. All products may not be available locally. The information contained herein is Proprietary to Exxon Mobil Corporation or one of its subsidiaries. This information should not be given to unauthorised third parties without prior written consent of ExxonMobil. For additional information, please contact the ExxonMobil Technical Help Desk or contact the local ExxonMobil representative.



^{*} For extended oil drain intervals

Products introduction & overview - Jenbacher

The table below shows all product approvals for Type 2 to 4C engines. For Type 6C to 9 see next page.

Product

		Тур	e 2			Тур	e 3			Турє	4 A			Турє	4 B		1	Гуре	4 C [©]	B
	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas
Mobil Pegasus™ 1105*	•								•				•				•			
Mobil Pegasus™ 1107*																	•			
Mobil Pegasus™ 1005	•				•				•				•							
Mobil Pegasus™ 805	•				•				•	•	•	•	•	•	•	•	•	•	•	•
Mobil Pegasus™ 705	•				•				•	٠	٠	•	•	٠	٠	•	•	•	•	•
Mobil Pegasus™ 710			•	•			•	•												
Mobil Pegasus™ 605 Ultra 40		٠	٠	•		٠	٠	•		٠	٠	•		٠	٠	•		•	•	•
Mobil Pegasus™ 605														•	•	•				
Mobil Pegasus™ 610		•				•														
Mobil Pegasus™ 610 Ultra*		•	•	•		•	•	•												
Jenbacher N Oil 40**	•				•				•				•				•			

The specifications of the respective plant and engine manufacturers are priorities when selecting the right engine oil.

- Approved
- ▲ Field test
- OEM Recommended

This document is provided for information purposes only. ExxonMobil accepts no responsibility for the contents of this document and gives no warranty to any product recommendations made within or about its effectiveness when applied to the users' business. It is the users' sole responsibility to ensure that the correct product is chosen for the given application. Always consult OEM manuals for proper recommendations for your equipment, which may depend on, for example, make, model, operating conditions. ExxonMobil shall not be responsible for any loss sustained by any person or entity in connection with use of this document. Due to continual product research and development by ExxonMobil and/or OEM, the information contained herein is subject to change without notice. All products may not be available locally. The information contained herein is Proprietary to Exxon Mobil Corporation or one of its subsidiaries. This information should not be given to unauthorised third parties without prior written consent of ExxonMobil. For additional information, please contact the ExxonMobil Technical Help Desk or contact the local ExxonMobil representative.



^{*} For extended oil drain intervals

^{**} For doubled oil drain intervals vs other INNIO-approved gas engine oils. © 2020 INNIO. All rights reserved. Jenbacher is a trademark application or registered trademark of INNIO or one of its affiliates

Products introduction & overview - Jenbacher

The table below shows all product approvals for Type 6C to 9 engines. For Type 2 to 4C see previous page.

Product

	Ту	pe 6	C / 6	5 E	Ту	pe 6	F/	6J	Ту	pe 6	H / 6	δK		Тур	e 9	
	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas
Mobil Pegasus™ 1105*	•															
Mobil Pegasus™ 1107*	•				•				•				•			
Mobil Pegasus™ 1005	•															
Mobil Pegasus™ 805	•				•		•						A			
Mobil Pegasus™ 705	•		•	٠	•	٠	٠	•					٠			
Mobil Pegasus™ 710																
Mobil Pegasus™ 605 Ultra 40		٠	•	٠												
Mobil Pegasus™ 605		•														
Mobil Pegasus™ 610																
Mobil Pegasus™ 610 Ultra*																
Jenbacher N Oil 40**	♦				♦				•				•			

The specifications of the respective plant and engine manufacturers are priorities when selecting the right engine oil.

- Approved
- ▲ Field test
- OEM Recommended

This document is provided for information purposes only. ExxonMobil accepts no responsibility for the contents of this document and gives no warranty to any product recommendations made within or about its effectiveness when applied to the users' business. It is the users' sole responsibility to ensure that the correct product is chosen for the given application. Always consult OEM manuals for proper recommendations for your equipment, which may depend on, for example, make, model, operating conditions. ExxonMobil shall not be responsible for any loss sustained by any person or entity in connection with use of this document. Due to continual product research and development by ExxonMobil and/or OEM, the information contained herein is subject to change without notice. All products may not be available locally. The information contained herein is Proprietary to Exxon Mobil Corporation or one of its subsidiaries. This information should not be given to unauthorised third parties without prior written consent of ExxonMobil. For additional information, please contact the ExxonMobil Technical Help Desk or contact the local ExxonMobil representative.



^{*} For extended oil drain intervals

^{**} For doubled oil drain intervals vs other INNIO-approved gas engine oils. © 2020 INNIO. All rights reserved. Jenbacher is a trademark application or registered trademark of INNIO or one of its affiliates

Products introduction & overview - MAN

Product

		E08	334			E08	336			E26	576			E28	876			E28	348			E32	268			E28	342			E32	.62	
	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas
Mobil SHC Pegasus™ 40																																
Mobil Pegasus™ 1																																
Mobil Pegasus™ 1105																																
Mobil Pegasus™ 1107																																
Mobil Pegasus™ 1005																																
Mobil Pegasus™ 805																																
Mobil Pegasus™ 705																																
Mobil Pegasus™ 710																																
Mobil Pegasus™ 605 Ultra 40																																
Mobil Pegasus™ 605																																
Mobil Pegasus™ 610																																
Mobil Pegasus™ 610 Ultra*																																

The specifications of the respective plant and engine manufacturers are priorities when selecting the right engine oil.

Approved

This document is provided for information purposes only. ExxonMobil accepts no responsibility for the contents of this document and gives no warranty to any product recommendations made within or about its effectiveness when applied to the users' business. It is the users' sole responsibility to ensure that the correct product is chosen for the given application. Always consult OEM manuals for proper recommendations for your equipment, which may depend on, for example, make, model, operating conditions. ExxonMobil shall not be responsible for any loss sustained by any person or entity in connection with use of this document. Due to continual product research and development by ExxonMobil and/or OEM, the information contained herein is proprietary to Exxon Mobil Corporation or one of its subsidiaries. This information should not be given to unauthorised third parties without prior written consent of ExxonMobil. For additional information, please contact the ExxonMobil Technical Help Desk or contact the ExxonMobil representative.



^{*} For extended oil drain intervals

Products introduction & overview - MTU

Product

and the	Nat	Serie tural <i>F</i>	s 400 Aspira		т		s 400 harge			Series L32,	4000 L33			Series 61, Lé			Se	Series 4000 L64				
	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas		
Mobil SHC Pegasus™ 40	•				•																	
Mobil Pegasus™ 1																						
Mobil Pegasus™ 1105																						
Mobil Pegasus™ 1107	•				•								A				A					
Mobil Pegasus™ 1005	•	٠	•	•									•	•	•	•	•					
Mobil Pegasus™ 805	•	•	•	•	•	•	•	•	•				•	•	•	•						
Mobil Pegasus™ 705	•	٠	•	•	•	•	•	•	٠				•	•	•	٠						
Mobil Pegasus™ 710						•	•	•														
Mobil Pegasus™ 605 Ultra 40		A	A	A		A	A	A														
Mobil Pegasus™ 605	•	•	•	•	•	•	•	•														
Mobil Pegasus™ 610						•	•	•														
Mobil Pegasus™ 610 Ultra*																						

The specifications of the respective plant and engine manufacturers are priorities when selecting the right engine oil.

Approved

▲ Field test


This document is provided for information purposes only. ExxonMobil accepts no responsibility for the contents of this document and gives no warranty to any product recommendations made within or about its effectiveness when applied to the users' sole responsibility to ensure that the correct product is chosen for the given application. Always consult OEM manuals for proper recommendations for your equipment, which may depend on, for example, make, model, operating conditions. ExxonMobil shall not be responsible for any loss sustained by any person or entity in connection with use of this document. Due to continual product research and development by ExxonMobil and/or OEM, the information contained herein is subject to change without notice. All products may not be available locally. The information contained herein is Proprietary to ExxonMobil Corporation or one of its subsidiaries. This information should not be given to unauthorised third parties without prior written consent of ExxonMobil. For additional information, please contact the ExxonMobil Technical Help Desk or contact the local ExxonMobil representative.



^{*} For extended oil drain intervals

Products introduction & overview - MWM

Product

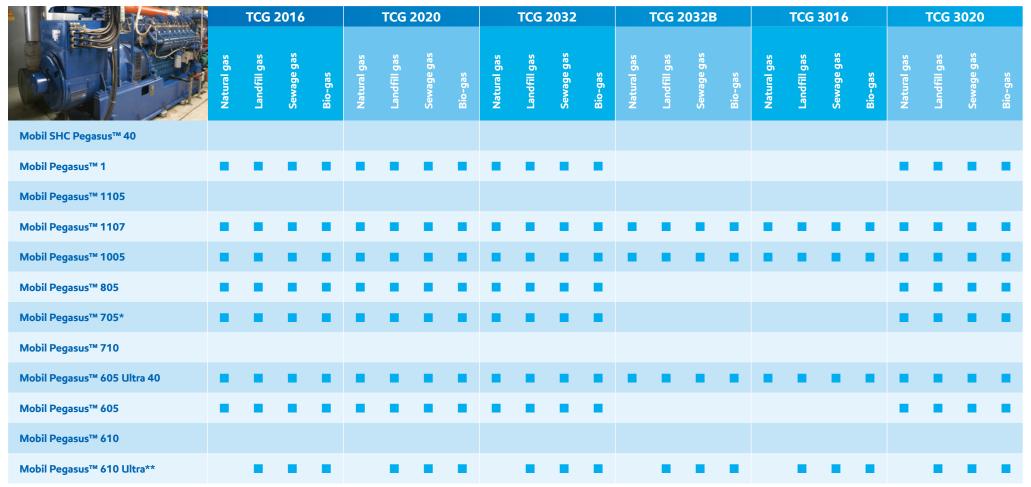

The specifications of the respective plant and engine manufacturers are priorities when selecting the right engine oil.

Approved

This document is provided for information purposes only. ExxonMobil accepts no responsibility for the contents of this document and gives no warranty to any product recommendations made within or about its effectiveness when applied to the users' business. It is the users' sole responsibility to ensure that the correct product is chosen for the given application. Always consult OEM manuals for proper recommendations for your equipment, which may depend on, for example, make, model, operating conditions. ExxonMobil shall not be responsible for any loss sustained by any person or entity in connection with use of this document. Due to continual product research and development by ExxonMobil and/or OEM, the information contained herein is subject to change without products may not be available locally. This information should not be given to unauthorised third parties without prior written consent of ExxonMobil. For additional information, please contact the ExxonMobil Technical Help Desk or contact the local ExxonMobil representative.



^{*} MOBIL Pegasus™ 705 is not recommended anymore for design of MWM engines from 2013.

^{**} For extended oil drain intervals

Products introduction & overview - Waukesha

Product

		VGF S	Series			VHP S	Series		275	GL/G	L+ Ser	ies		APG S	Series		220GL Series			
	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas	Natural gas	Landfill gas	Sewage gas	Bio-gas
Mobil SHC Pegasus™ 40																				
Mobil Pegasus™ 1					•															
Mobil Pegasus™ 1105																				
Mobil Pegasus™ 1107																				
Mobil Pegasus™ 1005																				
Mobil Pegasus™ 805					•															
Mobil Pegasus™ 705																				
Mobil Pegasus™ 710																				
Mobil Pegasus™ 605 Ultra 40																				
Mobil Pegasus™ 605																				
Mobil Pegasus™ 610																				
Mobil Pegasus™ 610 Ultra*																				

The specifications of the respective plant and engine manufacturers are priorities when selecting the right engine oil.

Approved

This document is provided for information purposes only. ExxonMobil accepts no responsibility for the contents of this document and gives no warranty to any product recommendations made within or about its effectiveness when applied to the users' business. It is the users' sole responsibility to ensure that the correct product is chosen for the given application. Always consult OEM manuals for proper recommendations for your equipment, which may depend on, for example, make, model, operating conditions. ExxonMobil shall not be responsible for any loss sustained by any person or entity in connection with use of this document. Due to continual product research and development by ExxonMobil and/or OEM, the information contained herein is subject to change without notice. All products may not be available locally. The information contained herein is Proprietary to ExxonMobil Corporation or one of its subsidiaries. This information should not be given to unauthorised third parties without prior written consent of ExxonMobil. For additional information, please contact the ExxonMobil Technical Help Desk or contact the local ExxonMobil representative.



^{*} For extended oil drain intervals